


CreatBot D600



Print volume : 600*600*600mm

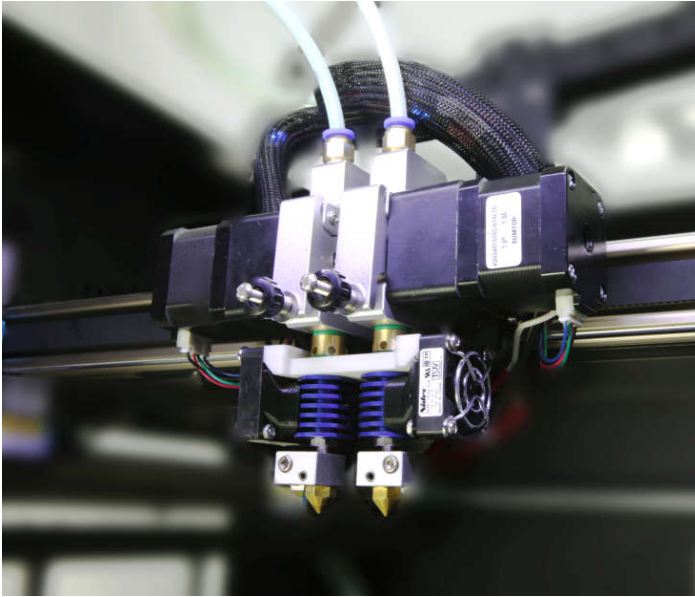

Nozzle diameter :	0.4(Support 0.3~1.0mm)	Filament diameter:	2.85/3.0 mm
Minimum thickness :	0.04 mm	OS platform:	Windows, Mac OS
Positioning accuracy :	XYZ Axis 0.01 mm	Language:	English, Multi-language
Printing speed :	120 mm/s	Software:	CreafWare
Nozzle temperature :	Max. 400 Degree	Power supply:	110~220V 360W
Hot bed temperature :	Max. 120 Degree	Weight :	180Kg
Filament materials:	PLA, ABS, Nylon,PETG,HIPS,etc	Dimension:	1030*1000*1260mm
Touch screen:	Yes	Fully enclosed :	Yes


PARAMETERS

FEATURES

PRODUCT FEATURES

All Metal Chassis

The 3D printer requires a certain weight to insure the stable operation, so a metal chassis is the best choice for a 3D printer. It ensures the chassis does not deform in a very long-distance transportation to you.

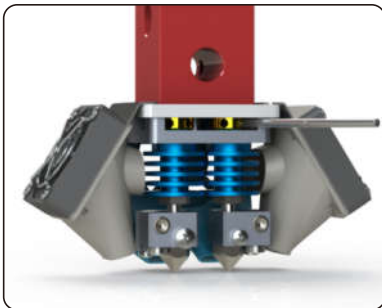

New extruder updated

Ultra-high temperature

Cooling system can intelligently adjust nozzle temperature to ensure best feeding and retract state, height adjustable nozzle can conveniently align multiple nozzles.

Highlights :

- Up to 400°C
- Support 3 nozzles
- Height adjustable nozzles

FEATURES


Filament Detection Auto pause no filament

When filament is exhausted, printer will automatically pause printing, and decrease platform, retract filament finally beep emitted 20 seconds.



Highlights :

- Unattended more easy
- Supplies used more thoroughly

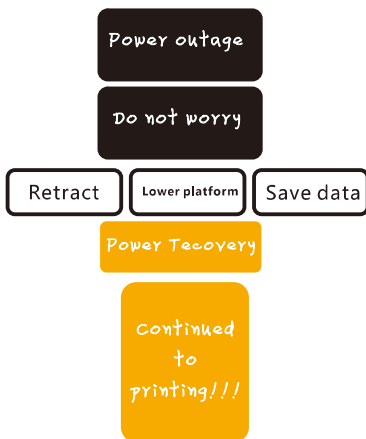

PRODUCT FEATURES

Continued to play Power outage restored

When an unexpected power, the printer automatically remembers the current position and stores the data lower the platform and retract filament.

Highlights :

- No filament overflow
- Lower platform, no iron kissed
- Accurate position memory, docking seamless



河南速维电子科技有限公司
Henan Suwei Electronics Technology Co., Ltd.

联系电话：4000-558-930

Skype ID: creatbot

公司网址：www.CreatBot.com

电子邮箱：info@creatbot.com

公司地址：郑州市经开区航海路第二大街
兴华大厦A806



微信扫一扫